


## PHTHALIC ANHYDRIDE

Chemical Formula : C<sub>6</sub>H<sub>4</sub> (CO)<sub>2</sub>O  
Molecular weight : 148.1  
CAS Registry Number : 85-44-9

Molecular Structure :



Reach Registration Number:

01 - 2119457017 - 41 - 0010

Description: Phthalic Anhydride is an important aromatic di-carboxylic acid anhydride, which is widely used in the manufacture of Alkyd Resins for Paints, Inks and Coatings, Unsaturated Polyester Resins, Plasticizers and Pigments.

### SPECIFICATIONS:

Characteristics	Unit	Guaranteed		Typical
Appearance	-	White Flakes		White Flakes
Purity (Gas Chromatography)	Wt. %	Min.	99.8	99.9
Maleic Anhydride (GC)	Wt. %	Max.	0.05	0.02
Solidification Point	° C	Min.	130.8	130.8
Melt Color	APHA	Max.	20	10
Heat Stability	APHA	Max.	50	30
Free Acidity (as Phthalic acid) *	Wt. %	Max.	0.1	0.05
Ash *	PPM	Max.	50	20
Iron *	PPM	Max.	3	1
Naphthaquinone *	PPM	Max	5	Not Detected
Naphthalene *	PPM	Max	20	Not Detected

Note: \* parameters that will be reported on request

### PACKAGING:

1. Laminated HDPE / PP Bags. Net Weight - 25 Kg 2. Bulk Bags. Net Weight - 1000 /750 /600 /500 Kg	<p><b>Full Container Load (FCL):</b></p> <p>3. Packed in Bulk Bags:</p> <p>a) 1000 Kg X 10 and 750 Kg X 10 bulk bags on Pallets = 17.5 MT / FCL</p> <p>b) 600 Kg X 3 Bulk Bags on Pallet = 1.8 MT X 10 Pallets = 18 MT / FCL</p> <p>c) (500 Kg X 2 Bulk Bags on Pallet X 10=10 MT) + (25 Kg X 32 Bags on Pallet X 10 = 8 MT) = 18 MT / FCL (500 Kg Bulk Bag is Antistatic Bag)</p>
<b>Full Container Load (FCL):</b> 1. Loose stuffing of 25 Kg Bags: 840 X 25 Kg Bags = 21 MT / FCL	
2. Palletised & Stretch Wrapped Packed in 25 Kg Bags 40 X 25 Kg Bags / Pallet = 1.0 MT 36 X 25 Kg Bags / Pallet = 0.9 MT 32 X 25 Kg Bags / Pallet = 0.8 MT	

- a) 1.0 MT X 10 Pallets and 0.8 MT X 10 Pallets = 18 MT / FCL  
b) 1.0 MT X 10 Pallets and 0.9 MT X 10 Pallets = 19 MT / FCL

**Health Hazard:**

Phthalic Anhydride is not poisonous. However, inhalation, or prolonged exposure must be avoided. Its dust irritates the mucous membrane. It is recommended to wear Safety Goggles, while handling this material. Always refer to the Material Safety Data Sheet (MSDS) for detailed information on safety.


**Fire and Explosion Hazard:**

Phthalic Anhydride whether molten or solid is an inflammable material and its dust and vapours can form explosive mixture, when in contact with air. It is essential to store or handle the material in a well-ventilated area away from any source of ignition.

**Storage:**

Phthalic Anhydride should be stored in cool, properly covered, dry area, away from direct sunlight. It should not be exposed to rain/ humidity as this leads to formation of Phthalic Acid, which is insoluble in Benzene and lowers the Melting Point.

**Typical Reactions, Products and Applications:**

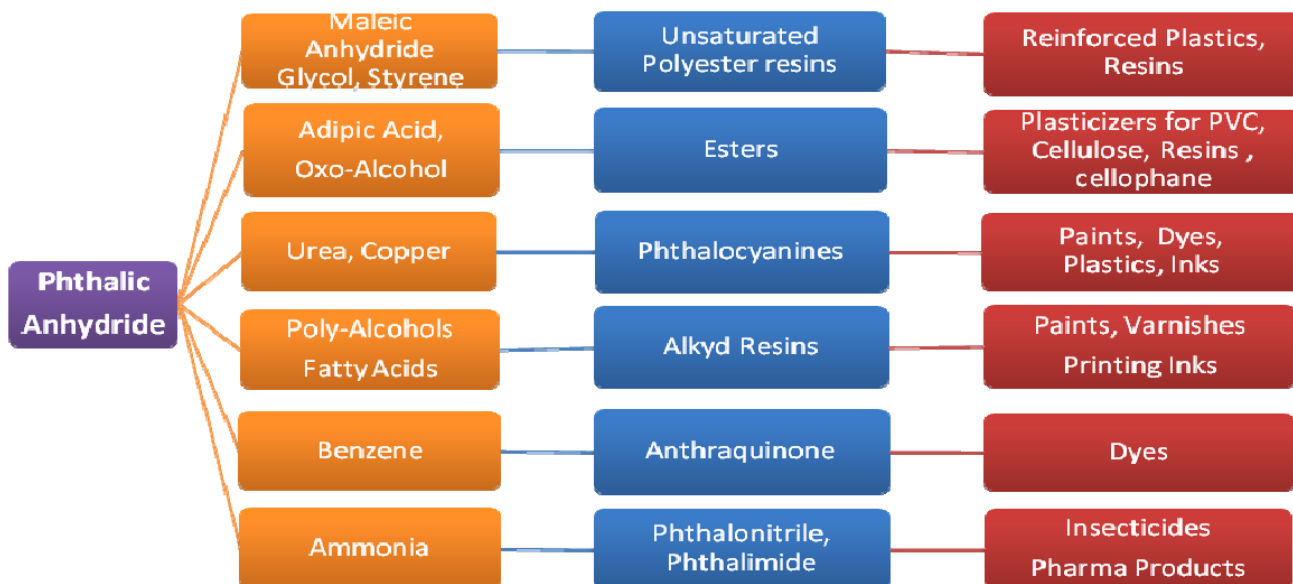

For further details please contact  
Thirumalai Chemicals Limited

<p><b>Factory:</b></p> <p>25-A, Sipcot Industrial Complex Ranipet - 632 403 Tamil Nadu, India. Phone: +91-4172-244441 /2/6/8 Fax : +91-4172-244308 e-mail: <a href="mailto:nair.pmc@thirumalaichemicals.com">nair.pmc@thirumalaichemicals.com</a> Contact: Mr. P.M.C.Nair</p>	<p><b>Mumbai Office:</b> (Sales &amp; Business)</p> <p>"Thirumalai House" Plot No.101-102, Road No.29, Sion (East) Mumbai-400 022, Maharashtra, India. Phone :+91-22-43686200 Fax : +91-22-2401-1699 / 7869 e-mail : <a href="mailto:chetan.b@thirumalaichemicals.com">chetan.b@thirumalaichemicals.com</a> Contact: Mr. Chetan Bhatt</p>	<p><b>Chennai Office:</b> (Sales &amp; Business)</p> <p>SPIC HOUSE, 5<sup>th</sup> Floor, No.88, Mount Road, Guindy, Chennai - 600 032 Tamil Nadu, India. Phone:+91-44-66057700 e-mail : <a href="mailto:ramaraju.svs@thirumalaichemicals.com">ramaraju.svs@thirumalaichemicals.com</a> Contact: Mr. S.V.S. Rama Raju Mr. Soni S. Muricken</p>
---	---	--

Website: <http://www.thirumalaichemicals.com>

The present product data sheet has the purpose of inform the clients on the quality of our product. The data herein is based on our present best knowledge. For a better suitability of the product for your particular purpose, tests are recommended prior product use. Our clients must be sure that the present data sheet hasn't been changed or replaced by a newer edition.